


# Robin 600 PureWhite SmartWhite


## Photometric Diagram

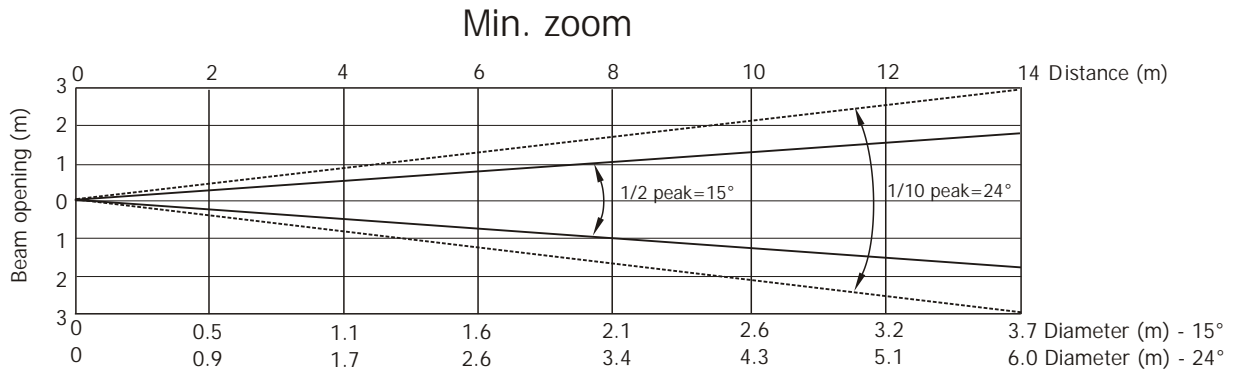

Distance (m)	2	4	5	6	8	10	12	14	
WW (2800K)	15188/1411	3797/353	2430/226	1688/157	950/89	608/56	422/39	310/29	Intensity (center) Lux/Footcandles
CW (6300K)	22188/2061	25547/515	3550/330	2465/229	1387/129	888/83	616/57	452/42	
WW+CW (4300K)	34375/3194	8594/798	5500/511	3819/355	2148/200	1375/128	955/89	700/65	


### Illuminance distribution

Distance=5m

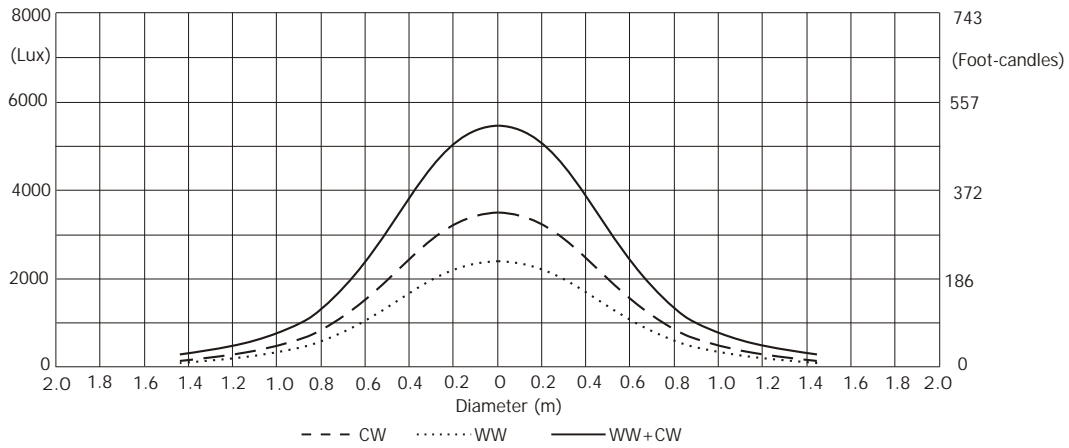

# Robin 600 PureWhite SmartWhite

## Photometric Diagram

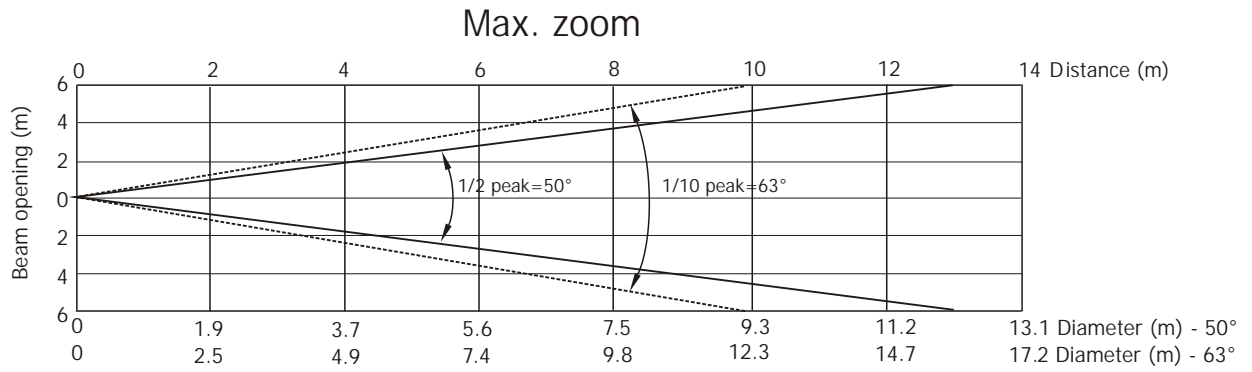

Distance (m)	2	4	5	6	8	10	12	14	
Warm White	2000/186	500/47	320/30	222/21	125/12	80/7	56/5	41/4	Intensity (center) Lux/Footcandles
Cool White	2938/273	734/68	470/44	184/17	184/17	118/11	82/8	60/6	
WW+CW	4688/436	1172/109	750/70	521/48	293/27	188/17	130/12	96/9	

### Illuminance distribution

Distance=5m

