

# Q-8

IP66 RGBW LED Flood / Pixel / Blinder / Strobe

The **DualSource™** all-rounder fixture



#### DualSource™

2 Independent Light Sources  
Optimized Power Management




#### TruColor+™

High Color Rendering  
Enhanced Color Engine



#### ThermalDrive™

Advanced Temperature Control  
Hybrid Cooling



#### DryTech™

Integrated Patented Dehumidification  
Active Moisture Removal

IP66



CE



RoHS

 **SGM®**

# Welcome to the next level



## Performance meets functionality

One single luminaire with two punchy strobes, a high color rendering floodlight, and a direct-view blinder with pixel capabilities.

Imagine a blinder for an upstage wall on your popular music festival, specified as key lighting for film and broadcast applications. With the Q-8, you invest in one light that can do both and do both well. And at the end of the day, this IP66 fixture only needs a high-pressure shower before going back to the truck.

The SGM Q-8 is a **DualSource™** touring fixture that is made to the quality standards of a studio fixture. The evolution of the Q-7 brings to market a combined 52,675 lumens\* strobe blinder, and a 51,771 lumens\* studio-quality floodlight with TLCI 90+ (**TruColor+™**).

## The Q-8: everything you liked, and more

You love everything about Q-7. It's flexible, it's easy to use, it looks nice. We can't reinvent what already works, but we can take it to the next level. The Q-8 inherits the durability of the P-6 and the innovation of the G-7 BeasT in a versatile, high-quality **DualSource™** tool.

Superior performance, new features, advanced control.

## What's new?

### Double-tap strobe, segment controlled

The Q-8 implements 2 completely independent linear strobe blinders, based on G-7 BeasT's LEDs. These powerful strobe blinders are located at the top and bottom of the floodlight section, keeping all the advantages of the Q series while delivering new effects and 8 controllable pixels. In addition, the Q-8 includes a new dual color strobe feature for the RGBW panel, allowing to strobe in a color while using a different color in the background. Two different light sources, double strobe effect, twice the fun.

### 2 color engines in the same luminaire

While keeping the characteristic SGM color mixing as the default configuration, the Q-8 brings added value with our brand new **VersaPath™**: a designer selectable algorithm for advanced control over color transitions. With SGM's **VersaPath™**, operators can warm up or cool down their mixed RGB colors over the black body curve, deciding themselves which dominant prevails when moving from one color to another. When combined with CTC, Q-8 users can also emulate color filters over a specific native color temperature or mimic the color path response of third-party RGB fixtures.

### The next level on RGBW's applicability: **TruColor+™** high color rendering

With a calibrated CRI performance above 90 and a 95+ TLCI via RAW modes, the Q-8 is the first RGBW fixture to achieve this level of white reproduction when mixing all 4 LEDs. Thanks to our brand new **TruColor+™** technology, the Q-8 can deliver up to 47,232 lumens\* at 5,500 K with excellent color rendition (CRI 96). Being already a great floodlight for close distances and medium-throws, the Q-8 color specs open a wide range of applications in different segments.

### NextGen design platform

It takes a great team to be this reliable. With IP66 rating, a rock-solid head with integrated dehumidifier, and a sealed IP67 wet base, we have turned a long-lasting tool into a compact dual-purpose tank. This is the result of extensive research, in-house danish manufacturing, and ambitious product testing. The Q-8 users benefit from our next-gen **ThermalDrive™** control, our patented **DryTech™** system, and our 12 years of experience in all-weather lighting technology. We focus on building quality.

\* All photometric values are verified peak measurements obtained with goniometer scan/SGM illumination lab 1.6.0.0.



## Stage

Direct view effects

Mark is a highly-skilled Touring Operator.

Each Q-8 brings him two completely independent strobe lights and a powerful color surface with pixel capabilities. He gets eye-candy effects, a close-distance wash, and two insanely bright blinders in just one standard-size fixture.



**Omega brackets**  
With 1/4 turn fasteners



**Filter frames**  
4 magnetic diffusers



**Flightcase (4 units)**  
Amptown-made premium SIP case



## Theater

Symmetrical cyclorama

Aisha has 25 years of experience in theatrical applications.

The Q-8 allows her to create deep saturated scenes in cycloramas and backdrops. Features such as the Q-8's extended dimming curves and **VersaPath™** color engine enhance her designs by allowing subtle color transitions and superior dimming.



**Omega brackets**  
With 1/4 turn fasteners



**4-way barndoors**  
4 adjustable flaps



**8-way barndoors**  
8 adjustable flaps



### A-4

The A-4 is a smart and compact node that allows RDM monitoring, show recording, scheduled playback, and remote network control of up to 132 Q-8s via 4 dedicated universes. The A-4 includes RJ45 and XLR 5-pin connectors and supports the ArtNet and sACN protocols. For studio applications, the A-4 can measure and report the average ambient temperature in the lighting rig, ensuring optimal LED thermal management for high-demanding camera setups.



### USB UPLOADER CABLE

As part of its seamless continuous improvement DNA, SGM offers frequent firmware updates for the whole product portfolio. Simple and compact, this USB to DMX cable enables updating of official firmware and channel by channel control of DMX values when used with the supplied SGM Firmware Tool software. While suitable for Q-8, the USB Uploader cable applies to any SGM luminaires with DMX physical connections, developed after 2011.

### POWER CABLE WITH IP CONNECTOR



Every Q-8 includes in its packaging a TRUE1-compatible power cable, specifically tested to comply with the IP-66 rating. To ensure optimal all-weather protection, SGM recommends the use of this AC cable with lockable 3-pin / 16A-rated connector in all SGM units with chassis connectors. The Q-8 does also include a power-thru chassis connector, allowing to daisy chain more than one unit in the same circuit.

### VACUUM TEST KIT



The Q-8 includes the SGM's patented **DryTech™** system, based on active dehumidifiers and integrated ePTFE membranes. This hassle-free technology is fully maintenance free, but calls for testing in case the fixture is disassembled. The SGM Vacuum Test Kit is a calibrated service tool that verifies the IP-66 protection is still functioning after having reassembled the fixture in a user friendly, total guided setup. It is delivered in a robust flight-case, suitable for both touring and workshops.

## Studio

High TLCl softlight



Lisa works as a Cinematographer for several advertising agencies.

When filming at the studio, the Q-8 gives her excellent color rendition, a versatile color temperature range, and an extensive frequency adjustment. On location, the Q-8's IP-66 rating, compact size, and wireless control are a huge plus.



**DoPchoice Snapgrid®**  
Light spread control



**DoPchoice Snapbag®**  
Soft lightbank



**Omega or 28 mm spigot**  
Combinable brackets

## Architainment

Wide angle floodlighting



Juan designs outdoor events and short-term installations.

He benefits from the Q-8's accurate color mixing, even distribution, and wide angle beam. The panel can be used for wall-washing and accent lighting, while the two strobe lines work great for projects that require high visibility and special effects.



**Half anti-glare shield**  
Oxsilian coated



**Full anti-glare shield**  
Oxsilian coated



**POI brackets**  
Anti-corrosion mounting

**Two powerful strobe blinders**

52 high-output white 7,000 K LEDs  
4 pixel segments with 8-bit and 16-bit control  
Individual parabolic multi-reflectors  
75° beam angle

**High-TLCI RGBW LED panel**

880 RGB LEDs and 880 white 5,700 K LEDs  
4 pixel segments with 8-bit and 16-bit control  
High CRI and high TLCI (>90)  
RGBW dual color strobe feature

**Wide angle spread**

110° beam angle  
Optimized look for direct view  
Optional SNAPGRID® and SNAPBAG®  
Optional magnetic filter frames

**All-Weather IP66 design**

Integrated dehumidifier and ePTFE membrane  
Humidity and heat sensors with smart control  
RDM remote monitoring



**Full control over effects and color features**

7 **DualSource™** macros with speed control  
2,000 K to 10,000 K Color Temperature Control  
RGBW, CMY, HSI and XY in calibrated and RAW modes  
DMX-configurable standard path and **VersaPath™**

**Superior dimming performance**

3 master intensity channels  
13 dimming curves including extended ranges  
Optimized low-end dimming

**Studio features**

Extensive frequency control over DMX  
0 - 100% fan speed control  
Color filter emulation and plus/minus green

**Multiple and reliable connections**

IP66 power in and power thru chassis connectors  
IP67 5-pin DMX chassis connectors  
Wireless DMX and RDM via LumenRadio transceivers



High power LEDs with individual parabolic reflectors



Tilt-locks with angle indicator



Handle and OLED display on top

## Expanded versatility

The Q-8 is here. As in any other family, the last to arrive inherits the values that have made the saga great: adaptability, efficiency, design; our sustainable formula to generate return on investment. Apart from being the first **DualSource™** in the series, the Q-8 is a fixture that draws on SGM culture and DNA.

Built tough, well thought, All-Weather.

The Q-2. A compact underdog ▶



◀ The Q-7. Needs no introduction



The Q-10. Hell yeah!!! ▶



## POI Option available

Designed for Permanent Outdoor Installations, the POI product package is specifically developed for durability and endurance in harsh environments. All POI Fixtures include IP66 rating, C-5M marine protection, 5 year warranty and **DryTech™** technology.



### Lightsource 1 (panel)

Light source	880 RGB LEDs and 880 white LEDs (5,700 K)
Max output	51,771 lumens
Efficacy	98 lumens / watt
Beam angle	108°
Pixel control	4 individually controllable segments, 16 bits
Dimming	Electronic, 16 bit
Strobe control	Intensity, duration, rate, effect, RGBW strobe (background control)
Max power consumption	592 W
LED expected lifetime	> 50,000 hours
LED frequency adjustment	3.1 Khz - 30 Khz, plus 7 high-speed presets (up to 2,000 fps)
Color temperature range	2,000 K - 10,000 K
Color features	2 color paths (standard / <b>VersaPath™</b> ), filter emulation, 16 bit
Color modes	RGB CTC, RGBW CTC, RGB+W CTC, HSI, CMY, XY
Color rendering, typical (calibrated)	CRI > 90 / TLCI >90 (above 4,900 K)
Color rendering, max (RAW)	CRI 95+ / TLCI 95+

### Lightsource 2 and 3 (strobe blinders - combined figures)

Light source	52 high-power white LEDs (7,000 K)
Max output	52,675 lumens
Efficacy	96 lumens / watt
Beam angle	75.2°
Pixel control	4 individually controllable segments, 16 bits
Dimming	Electronic, 16 bit
Strobe control	Intensity, duration, rate, effect for each individual source
Max power consumption	548 W
LED expected lifetime	> 20,000 hours

### General

Technical features	
Dehumidifier / ePTFE membrane	SGM <b>DryTech™</b> on head
IP Class / IK Rating / Corrosion class	Standard version IP66 / IK06 / No corrosion treatment
	POI version IP66 / IK06 / C5-M (ISO 12944)
Safety features	1 x retractile attachment point for safety wire

Programming and control	
Wireless control	LumenRadio wireless DMX and RDM (CRM™, W-DMX™ G2-G4S)
DMX channels	9 DMX modes (6, 10, 12 x 2, 27, 34, 36, 41, 52)
Standalone modes	SGM Quick Color, 24 programmable scenes (Only Std. version)

Electrical	
AC power, Max / Nominal	90-305 v 50-60 Hz / 100-277 v 50-60 Hz
Power Supply Unit	Inbuilt IP67 Auto-ranging electronic switch-mode
Electrical protection	Overload protection with automatic recover


Connections	
Data connections (USITT DMX512A)	Standard version IP67 XLR 5-pin connectors
	POI version 5 meter cable for DMX In and DMX Thru
Setting, addressing, and monitoring	Standard version RDM ANSI E1.20; OLED Graphical display on head
	POI version RDM ANSI E1.20 only
Power connections	Standard version IP66 power input connector and link-thru
	POI version Power cable 5 meter with bare ends

Thermal	
Thermal control	SGM <b>ThermalDrive™</b> (active + passive cooling)
Max humidity	98%
Temperature range, operating	-40° to +50°C / -40° to +122°F
Temperature range, start-up	-20° to +50°C / -20° to +122°F
Temperature range, storage	-40° to +80°C / -40° to +176°F

Physical	
Tilt angle / tilt locks	Standard version 0° - 220° with scale indicator / adjustable wing knobs
	POI version 0° - 220° with scale indicator / pignose locks
Dimensions (L x W x H)	520 x 320 x 166 mm / 20.5 x 12.6 x 6.5 in
Effective projected area	2.15 square feet
Mounting points / Orientation	Standard version 3 x 2 ¼ turn locking points / Any orientation
	POI version 6 M-10 locking points / Any orientation
Total weight	13.5 kg / 29.8 lbs
Color options	Black (RAL 9004), white (RAL 9010), custom RAL color

Optional accessories	
Filter options	SGM magnetic easy-fit spread angle filters and color frame
Accessory options	SGM 4-way and 8-way barndoors, SGM full and half anti-glare
	DoPchoice™ SnapBag® and SnapGrid®
Bracket options	SGM 28 mm spigot adapter, SGM POI omega brackets (M-10)

Certificates	
2014/35/EU: Low Voltage Directive	EN 60598-1, 60598-2-17, EN 62471, EN 60529
2014/30/EU: EMC Directive	EN 55103-1, EN 55103-2, EN 61000-3-2, EN 61000-3-3, EN 55015
RoHS2 Directive	2011/65/EU

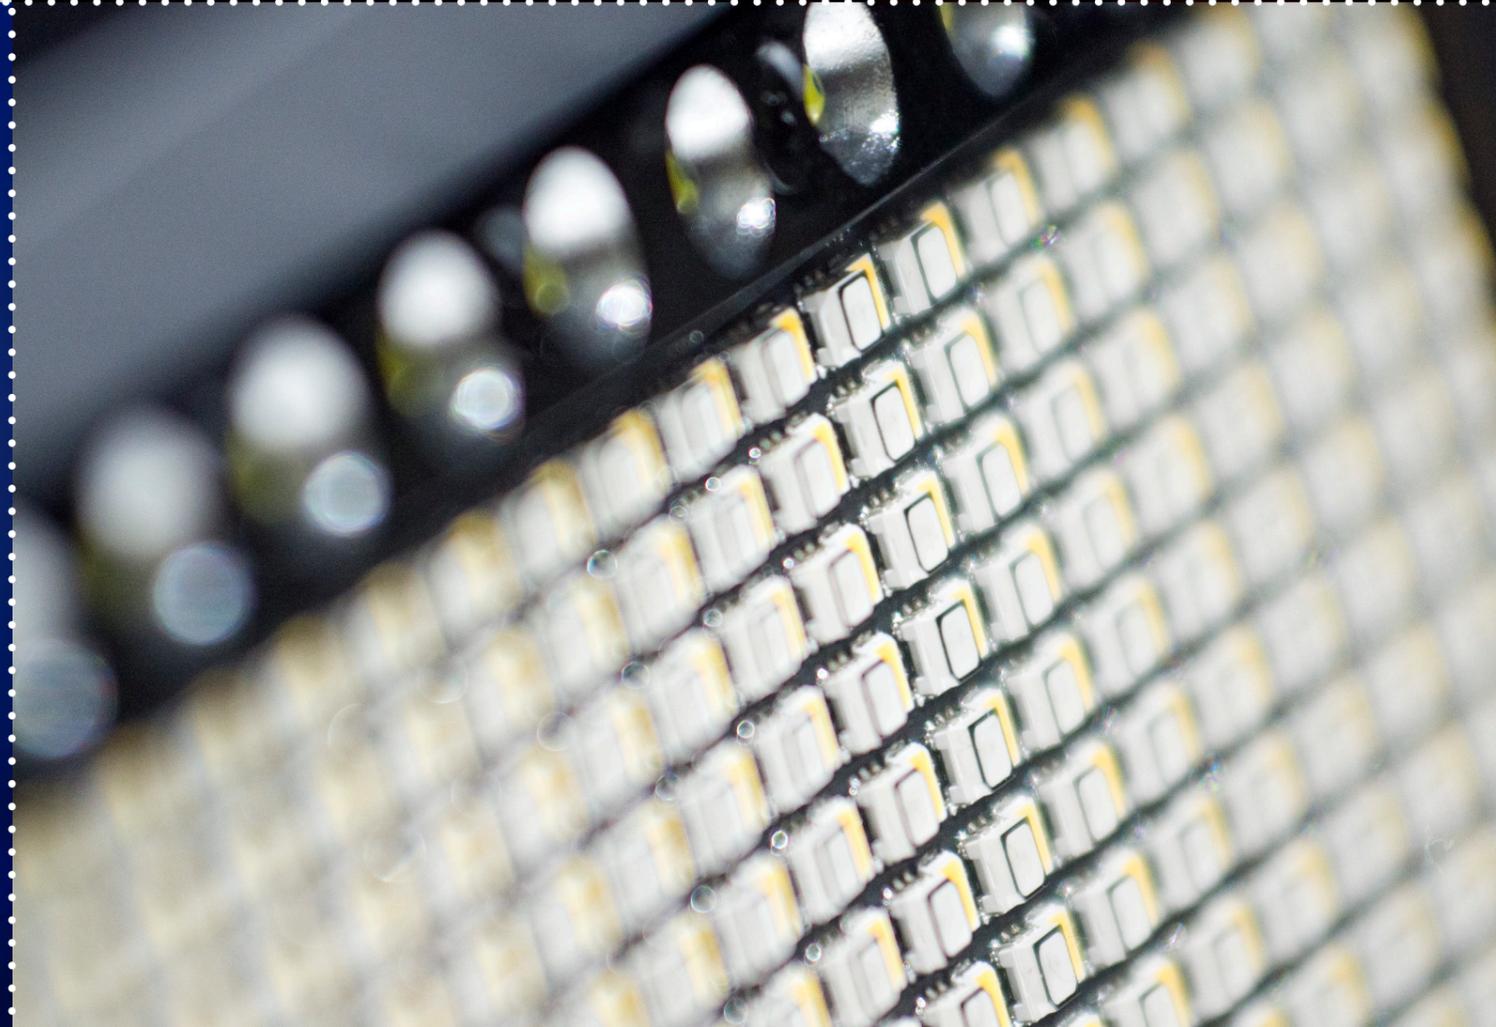

Fixtures

Ordering number	Standard products	Ordering number	POI products
80031750	Q-8 Flood Strobe, Std, BL	80251750	Q-8 Flood Strobe, POI, BL
80031751	Q-8 Flood Strobe, Std, WH	80251751	Q-8 Flood Strobe, POI, WH
80031752	Q-8 Flood Strobe, Std, CU	80251752	Q-8 Flood Strobe, POI, CU

Accessories

Ordering number	Product
83061173	4-way barndoors for P-6/Q-8, medium, BL
83061186	8-way barndoors for P-6/Q-8, medium, BL
83061176	Full anti-glare shield, medium, BL
83061177	Full anti-glare shield, medium, WH
83061178	Half anti-glare shield, medium, BL
83061179	Half anti-glare shield, medium, WH
83061170	Filter frame for P-6 / Q-8 – medium angle
83061171	Filter frame for P-6 / Q-8 – wide angle
83061168	Filter frame for P-6 / Q-8 – elliptical horizontal
83061169	Filter frame for P-6 / Q-8 – elliptical vertical
83061189	DoPchoice Snapbag for Q-8
83061190	DoPchoice Snapgrid for Q-8

Brackets

Ordering number	Product
83060623	Omega bracket with ¼ turn bolts, BL
83061202	Omega bracket with ¼ turn bolts, WH
83060639	28 mm spigot adapter for omega bracket

Flight cases

Ordering number	Product
82051509	Flight case for 4 pcs of P-6 / Q-8 incl. accessories

Converters / RDM administrators

Ordering number	Product
80070217	A-4 Art-Net to DMX converter

Cables

Ordering number	Product
07860275	Power cable with IP connector
83062011	SGM USB uploader cable

Service tools

Ordering number	Product
83061136	Vacuum Test Kit

What is in the box

**Standard\***

- Q-8 fixture
- 1 IP66 power cable
- 1 Omega bracket
- Printed leaflet with safety instructions

\*Please note the packaging for the fixtures does not include any other accessories like barndoors or filters. All these items are sold separately.

**Permanent outdoor installation (POI) \***

- Q-8 POI fixture
- 6 M-10 screws
- Printed leaflet with safety instructions

\*Please note the packaging for the fixtures does not include any other accessories like brackets, antiglare shields, or filters. All these items are sold separately.

Important notes

- It is the responsibility of the installer / user to install and operate the Q-8 in a way that complies with all applicable codes and local laws.

Developed, manufactured and tested in Denmark

- Premium user-centered design
- Flexible manufacturing process
- Short reaction time; faster deliveries
- Integrated support (after-sales / R&D / production)



JUNE/2021. The information in this document is subject to change without notice.



[www.sgmlight.com](http://www.sgmlight.com)