



PROTEUS RAYZOR BLADE L



The **Proteus Rayzor Blade L™** is a striking visual combination of Linear Wash, high intensity Strobe Lines and SparkLED FX inside a compact IP65 linear fixture design. Envisioned to provide the designer infinite creative control of powerful colors and high-powered strobe effects from a single unit it allows unlimited placement in any outdoor and indoor environment. Protected from dust and water ingress the Rayzor Blade L is part of Elation's industry leading Proteus Range of outdoor luminaires.

This fixture features Elation's unique patented SparkLED™ system and allows impactful Tilt sweep motions. With its wide zoom range from 6 to 45 degrees it provides intense and well-defined mid-air beams and light curtains at over 11,000 lumens as well as an exceptionally wide and even wash coverage, making it a perfect tool from stage washes, mid-air effects or audience blinders, even in adverse outdoor conditions. SparkLEDs offer a prominent and innovative LED pixel effect with dedicated high brightness pixels inside the large front lenses for additional layers of creativity. Driven by 12, independently controlled, 60W RGBW LEDs, delivering over 11,000 lumens of output with a total power of 720W, the Proteus Rayzor Blade L provides a powerful beam that stands out on any stage. The oversized front lenses create a large visual surface on the fixture that is enhanced by the exclusive patent pending SparkLEDs technology. SparkLEDs consists of individual white LEDs, strategically placed inside the lens itself to create a unique additional layer, allowing designers access to a new and innovative way of creating interest on the stage. Proteus Rayzor fixtures offer this never seen before style of internal lens illumination for depth and visual impact. SparkLEDs are controllable by the lighting console or driven by a multitude of internal FX patterns. In addition to its powerful wash and SparkLED effects, the Proteus Rayzor Blade L provides two seamless high-intensity strobe lines with a total of 256 cool white LED dots. Flanking the Rayzor lenses across the entire length of the fixture these dual strobe arrays offer incredible visual effects with a multitude of integrated FX or precise pixel control from the lighting console.



FEATURES

- IP65 Protected LED Tilt FX Fixture
- 12x 60W OSRAM RGBW LED with Pixel
- Control
- 48x 2W SparkLED™ Effect with Pixel Control
- Dual 128x1W Strobe Pixel Line
- Extreme Zoom – 6° for mid-air beam to 45°
- for even washes
- Fast and precise 210° Tilt Rotation



SPECIFICATIONS

SOURCE

(12) 60W Osram RGBW LEDs
 (48) 2W White SparkLED™
 (256) 1W Strobe LED
 50,000 Hour Average LED Life*
 *Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

11,000 Total Lumen Output (RGBW)
 CRI 80
 Zoom Range 6° - 45°
 Color temperature SparkLED 4000K
 Color temperature Strobe Line 6500K

EFFECTS

Motorized Zoom
 Linear Color Temperature Presets (2700-8000K)
 RGBW Color Mixing and Pixel Control
 White SparkLED Lens Effect
 Dual White Strobe Lines (128 pixels per side)
 Color Presets and Macros
 Electronic Strobe and Variable Dimming Curves
 16-bit Dimming

CONTROL / CONNECTIONS

3 DMX Channel Modes (25/76/190 channels)
 Pixel controlled Wash, SparkLED and Strobe LED
 210° Tilt Movement
 DMX Adjustable Refresh Rate (900 -25000 Hz)
 (6) Button Touch Panel
 Full Color 180° Reversible LCD Menu Display
 RDM Support
 IP65 5pin XLR DMX In/Out
 IP65 RJ45 Ethernet In/Out (Art-Net, sACN)
 IP65 Locking Power Cable In

SIZE / WEIGHT

Length: 39.5 in (1004mm)
 Width (Base): 7.6 in (194mm)
 Width (Head): 6.1 in (155mm)
 Height (head up): 13.2 in (336mm)
 Height (head 90 degree): 11.3in (288mm)
 Weight: 71.4 lbs. (32.4kg)

ELECTRICAL / THERMAL





AC 100-240V 50/60Hz
 1400W Max Power Consumption

APPROVALS / RATINGS

CE | cETLus | IP65

Specifications and documentation subject to change without notice.

DIMENSIONAL DRAWINGS

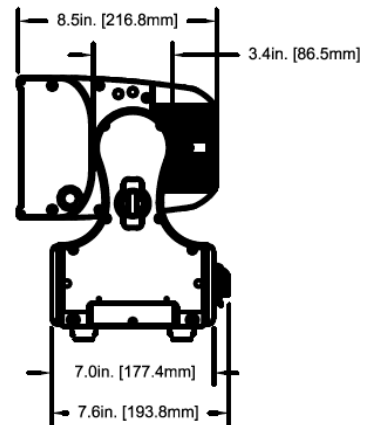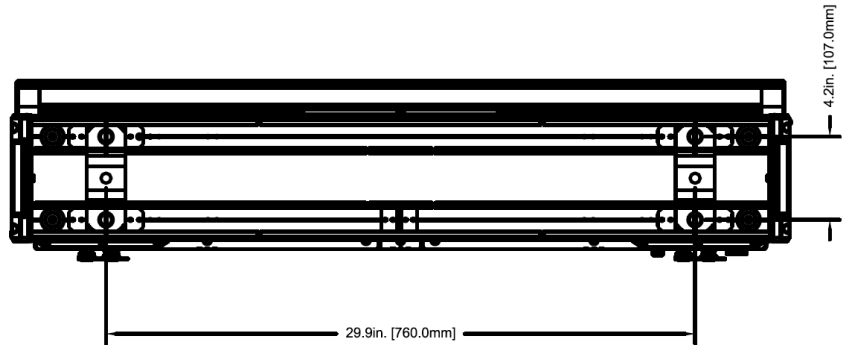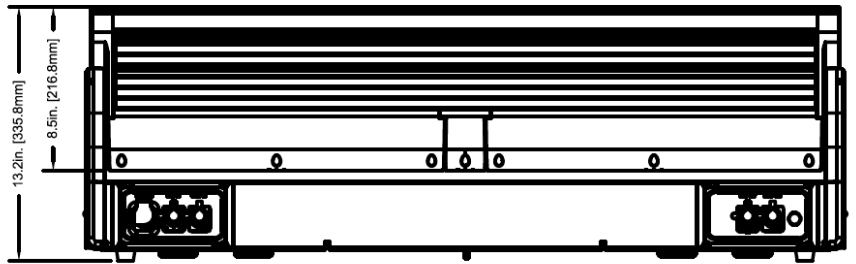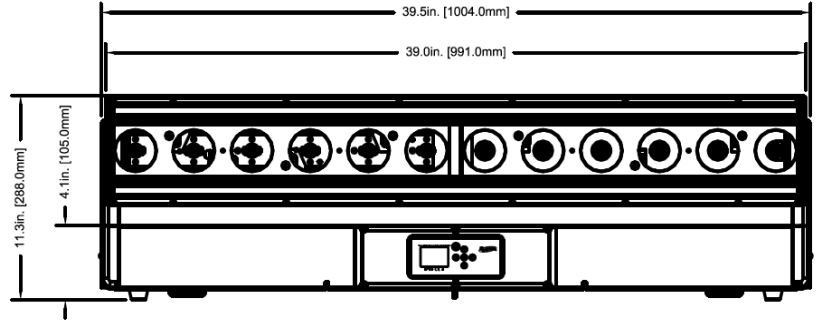

ORDERING INFORMATION

PRR048	Proteus Rayzor Blade L (US Sku)
1237000255	Proteus Rayzor Blade L (EU Sku)



FOAM IN LAY DIMENSIONAL DRAWINGS

The **Proteus Rayzor Blade L™** fixture ships with a custom fitted polyurethane foam FIL (Foam In Lay) packaging insert, which easily fits into a custom sized flight case (not included), and provides enhanced impact protection during transport.

