


MIN ZOOM

Beam opening

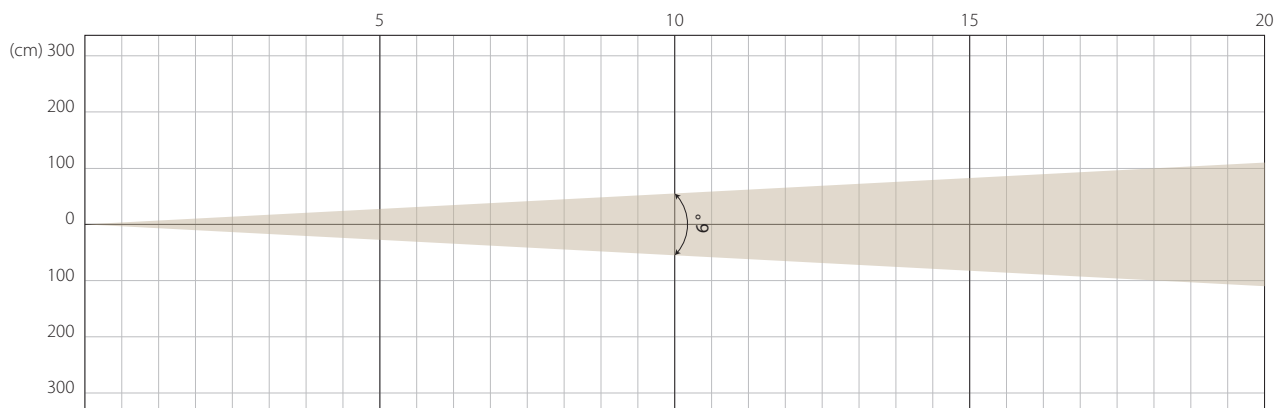


Intensity

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	96980	0,52	23440	1,04	10450	1,56	5913	2,08

MIDDLE ZOOM

Beam opening

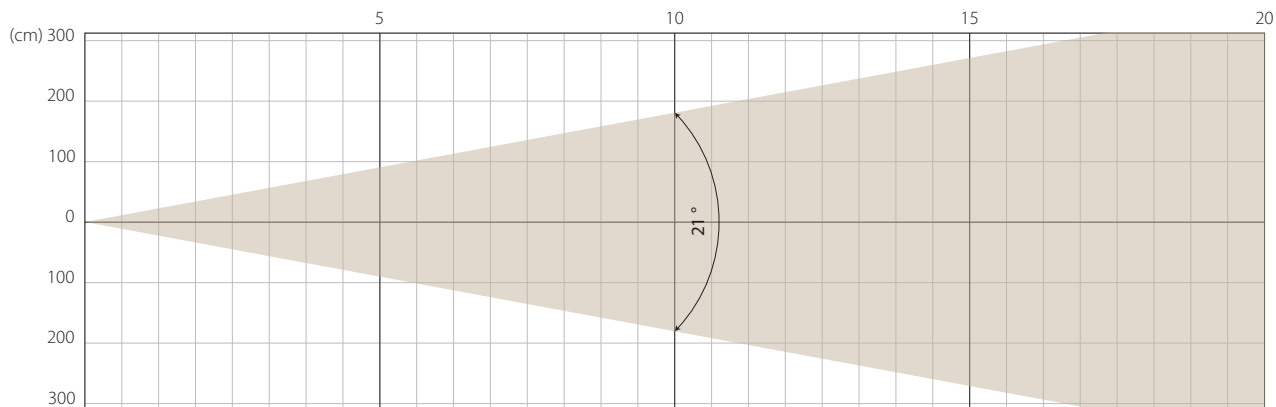


Intensity

Distance (m)	5		10		15		20	
	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	16980	1,85	4491	3,62	2199	5,3	1296	7,1

MAX ZOOM

Beam opening

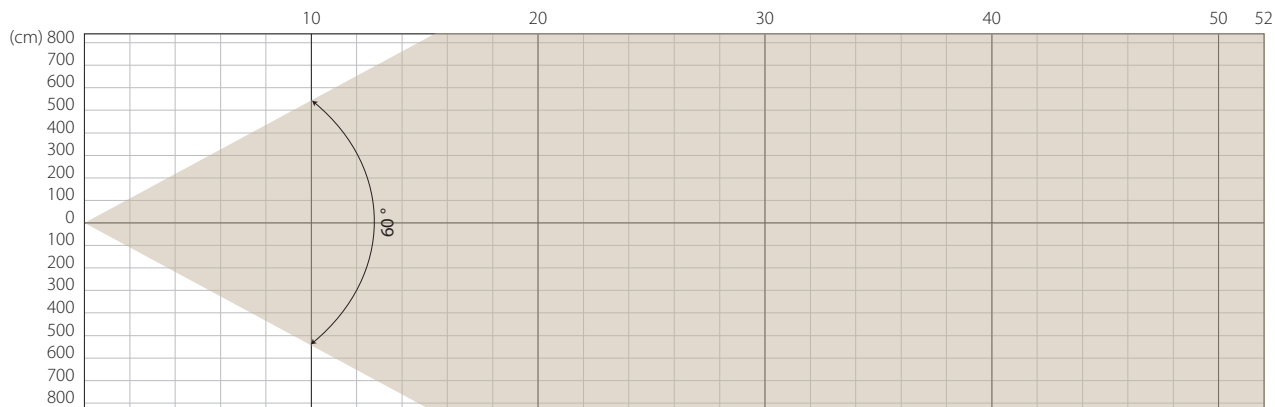

Intensity

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	2459	5,83	736	11,66	356	17,49	153	23,32



Total Flux	52897 lm (@zoom 106)
CCT @LED engin	8000 (±400K)
CCT @open	7064 (±400K)
Ra @open	72 (Ra: 70)
TLCI	49
TM-30	Rf: 70, Rg: 92

Fan Mode	Noise Level (dBA)	Flux (lm)
Auto Mode	48	50859
Silence Mode	42	42257
Stage Mode	60	52897
Studio Mode	43	45738

Note: noise messured @1m distance, static status, ambient 31 dBA.

Voltage / Power	120-240V, 50-60HZ	1600W
Fixture Dimension / Weight	486x280x811mm	46kg
Packing Dimension / Weight	73x57x73.5cm	64kg